



Accessories

for Temperature Sensors

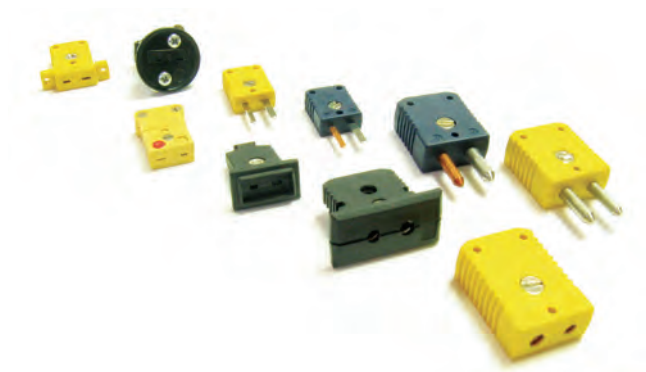


The sensor accessories in this section are selected due to their suitability for rugged environment, high temperature resistance and wide application in industry.

Installation

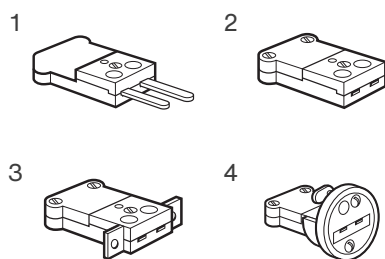

	Stock Code	Description
1	RSN-JCWM-YUM10J	Thermocouple Type "J" mini connector, male, cable-type
	RSN-KCWM-YUM10K	Thermocouple Type "K" mini connector, male, cable-type
2	RSN-JCWF-YUF10J	Thermocouple Type "J" mini connector, female, cable-type
	RSN-KCWF-YUF10K	Thermocouple Type "K" mini connector, female, cable-type
3	RSN-JPWF-YUF11J	Thermocouple Type "J" mini connector, female, panel-mount
	RSN-KPWF-YUF11K	Thermocouple Type "K" mini connector, female, panel-mount
4	RSN-JPWF-YUF12J	Thermocouple Type "J" mini connector, female, panel-mount (round)

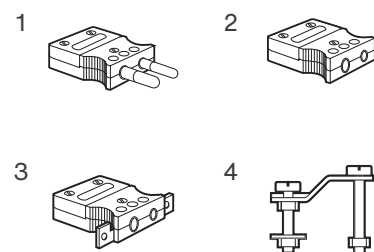

	Stock Code	Description
1	RSN-JCWM-YUM30J	Thermocouple Type "J" connector, male, cable-type
	RSN-KCWM-YUM30K	Thermocouple Type "K" connector, male, cable-type
2	RSN-JCWF-YUF30J	Thermocouple Type "J" connector, female, cable-type
	RSN-KCWF-YUF30K	Thermocouple Type "K" connector, female, cable-type
3	RSN-JPWF-YUF31J	Thermocouple Type "J" connector, female, panel-mount
	RSN-KPWF-YUF31K	Thermocouple Type "K" connector, female, panel-mount
4	RSN-ACWB-YUM10	Cable bracket for mini connector
	RSN-ACWB-YUM30	Cable bracket for standard connector

Sensor Cables


Stock Code	Description
RSC-J2L-PPBAA24	"J" PVC insulation (105°C max), 24AWG, stranded
RSC-J2L-TTBAA24	"J" PTFE insulation (250°C max), 24AWG, stranded
RSC-J2LFGGSDA24	"J" Fibreglass insulation (350°C max), 24AWG, stranded
RSC-K2L-PPBAA24	"K" PVC insulation (105°C max), 24AWG, stranded
RSC-K2L-TTBAA24	"K" PTFE insulation (250°C max), 24AWG, stranded
RSC-K2LFGGSDA24	"K" Fibreglass insulation (350°C max), 24AWG, stranded
RSC-C3L-PPBDA24	"Pt100/RTD" PVC insulation (105°C max), 24AWG, stranded
RSC-C3L-TTUDA24	"Pt100/RTD" PTFE insulation (250°C max), 24AWG, stranded
RSC-C3L-GGSDA24	"Pt100/RTD" PTFE insulation (250°C max), 24AWG, stranded

Compression Fittings



Stock Code	Description
RSK-PB1N4M-D047	Ø4.76mm 1/4" NPT thread, brass
RSK-PB1N4M-D060	Ø6mm 1/4" NPT thread, brass
RSK-PB1N2M-D047	Ø4.76mm 1/2" NPT thread, brass
RSK-PB1N2M-D060	Ø6mm 1/2" NPT thread, brass
RSK-PS1N4M-D047	Ø4.76mm 1/4" NPT thread, stainless steel
RSK-PS1N4M-D060	Ø6mm 1/4" NPT thread, stainless steel
RSK-PS1N2M-D047	Ø4.76mm 1/2" NPT thread, stainless steel
RSK-PS1N2M-D060	Ø6mm 1/2" NPT thread, stainless steel

Barrel Adapters

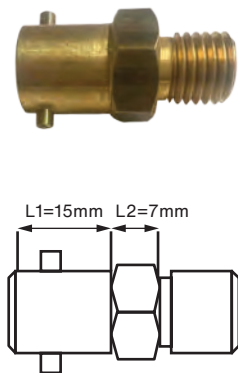

Stock Code	Description
RSK-BG-Y0311A-00	Ø11mm 1/8" BSP thread
RSK-BG-Y0312C-00	Ø12mm 1/4" BSP thread
RSK-BG-Y0312D-00	Ø12mm 3/8" BSP thread
RSK-BG-Y0312B-00	Ø12mm M12x1 thread
RSK-BG-Y0312A-00	Ø12mm M12x1.5 thread
RSK-BG-Y0313C-00	Ø13mm 1/4" BSP thread
RSK-BG-Y0313D-00	Ø13mm 3/8" BSP thread
RSK-BG-Y0313B-00	Ø13mm M12x1 thread
RSK-BG-Y0313A-00	Ø13mm M12x1.5 thread
RSK-BG-Y0315C-00	Ø15mm 1/4" BSP thread
RSK-BG-Y0315B-00	Ø15mm M12x1 thread
RSK-BG-Y0315A-00	Ø15mm M12x1.5 thread

Custom barrel adapters manufactured on request. Contact our sales agents